

超硬リーマ Cシリーズ C Series

商品コード : CC0.0000
Product Code
0.005mmとび
Increment

高精度加工対応 (+0.005)
刃径公差(Tolerance) (0)



Cシリーズの特長 Features of C Series

① 超低価格

コスト削減に寄与致します!!

リーマ素材に超硬を採用し、なおかつ価格を大幅に抑えました。工具寿命の向上と、工具のコストの削減の2つのテーマにより加工コスト削減のお手伝いを致します。

② 深穴の加工が可能


シャンク径を細くしてあるため、深穴の加工が可能。加工範囲が広がります。

③ 高精度

超硬リーマのベストセラー「Gシリーズ」と精度は同等。安心してお使い頂けます。

単価:円 unit price: in JPY

刃径 Diameter	標準定価 Retail Price
4.000	3,840
6.000	5,520
8.000	9,030
10.000	11,660
12.000	14,700



深穴の加工が可能
Suitable for Deep Hole cutting

① Specially low price setting

Save your production cost with C series!


Despite the high cost of carbide material, our price of C series is kept very low. Improved tool life and economical price setting help you cut down your processing cost.

② Suitable for Deep Hole Cutting

Suitable for reaming a deep hole. Shank diameter is kept smaller than a blade diameter of a reamer which allows deep-hole reaming.

③ Highly accurate

C series reamer's accuracy is equivalent to that of our bestseller G series reamer. It gives you satisfying results.

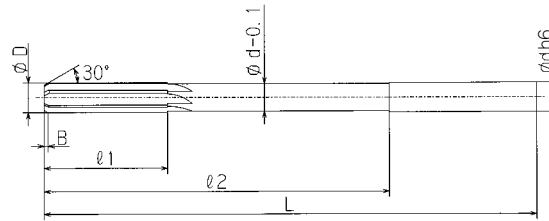

刃径公差 (+0.005)
(Tolerance) (0)

0.005mmとび
Increment

単価:円 unit price: in JPY

型式・刃径φD Diameter (呼び寸法)	刃長 ℓ1 Flute Length	首下長 ℓ2 Body Length	全長 L Overall Length	喰付長さB Chamfer Length	刃数 Number of Flutes	標準定価 Retail Price
CC 2.910~3.000	20	40	80	0.5	4	3,640
CC 3.005~3.995	〃	〃	〃	〃	〃	3,750
CC 4.000	〃	〃	〃	〃	〃	3,840
CC 4.005	〃	〃	〃	〃	〃	4,310
CC 4.010~4.995	〃	〃	〃	〃	6	4,310
CC 5.000	〃	〃	〃	〃	〃	4,620
CC 5.005	〃	〃	〃	〃	〃	5,080
CC 5.010~5.995	25	50	100	0.8	〃	5,080
CC 6.000	〃	〃	〃	〃	〃	5,520
CC 6.005~6.995	〃	〃	〃	〃	〃	6,570
CC 7.000	〃	〃	〃	〃	〃	7,770
CC 7.005~7.995	〃	〃	〃	〃	〃	8,720
CC 8.000	〃	〃	〃	〃	〃	9,030
CC 8.005	〃	〃	〃	〃	〃	9,930
CC 8.010~8.995	〃	60	115	1.0	〃	9,930
CC 9.000	〃	〃	〃	〃	〃	10,190
CC 9.005~9.995	〃	〃	〃	〃	〃	10,820
CC 10.000	〃	〃	〃	〃	〃	11,660
CC 10.005~10.995	〃	〃	〃	〃	〃	12,810
CC 11.000	〃	〃	〃	〃	〃	13,550
CC 11.005	〃	〃	〃	〃	〃	14,180
CC 11.010~11.995	〃	70	130	〃	〃	14,180
CC 12.000	〃	〃	〃	〃	〃	14,700
CC 12.005~12.100	〃	〃	〃	〃	〃	15,230

— シャンク径 一覧表 —

刃径Dの寸法範囲			シャンク径(d)			刃径Dの寸法範囲			シャンク径(d)			刃径Dの寸法範囲			シャンク径(d)		
以上	以下	基準寸法	以上	以下	基準寸法	以上	以下	基準寸法	以上	以下	基準寸法	以上	以下	基準寸法	以上	以下	基準寸法
2.91	3.005	2.9	5.21	5.305	5.2	7.51	7.605	7.5	9.81	9.905	9.8						
3.01	3.105	3	5.31	5.405	5.3	7.61	7.705	7.6	9.91	10.005	9.9						
3.11	3.205	3.1	5.41	5.505	5.4	7.71	7.805	7.7	10.01	10.105	10						
3.21	3.305	3.2	5.51	5.605	5.5	7.81	7.905	7.8	10.11	10.205	10.1						
3.31	3.405	3.3	5.61	5.705	5.6	7.91	8.005	7.9	10.21	10.305	10.2						
3.41	3.505	3.4	5.71	5.805	5.7	8.01	8.105	8	10.31	10.405	10.3						
3.51	3.605	3.5	5.81	5.905	5.8	8.11	8.205	8.1	10.41	10.505	10.4						
3.61	3.705	3.6	5.91	6.005	5.9	8.21	8.305	8.2	10.51	10.605	10.5						
3.71	3.805	3.7	6.01	6.105	6	8.31	8.405	8.3	10.61	10.705	10.6						
3.81	3.905	3.8	6.11	6.205	6.1	8.41	8.505	8.4	10.71	10.805	10.7						
3.91	4.005	3.9	6.21	6.305	6.2	8.51	8.605	8.5	10.81	10.905	10.8						
4.01	4.105	4	6.31	6.405	6.3	8.61	8.705	8.6	10.91	11.005	10.9						
4.11	4.205	4.1	6.41	6.505	6.4	8.71	8.805	8.7	11.01	11.105	11						
4.21	4.305	4.2	6.51	6.605	6.5	8.81	8.905	8.8	11.11	11.205	11.1						
4.31	4.405	4.3	6.61	6.705	6.6	8.91	9.005	8.9	11.21	11.305	11.2						
4.41	4.505	4.4	6.71	6.805	6.7	9.01	9.105	9	11.31	11.405	11.3						
4.51	4.605	4.5	6.81	6.905	6.8	9.11	9.205	9.1	11.41	11.505	11.4						
4.61	4.705	4.6	6.91	7.005	6.9	9.21	9.305	9.2	11.51	11.605	11.5						
4.71	4.805	4.7	7.01	7.105	7	9.31	9.405	9.3	11.61	11.705	11.6						
4.81	4.905	4.8	7.11	7.205	7.1	9.41	9.505	9.4	11.71	11.805	11.7						
4.91	5.005	4.9	7.21	7.305	7.2	9.51	9.605	9.5	11.81	11.905	11.8						
5.01	5.105	5	7.31	7.405	7.3	9.61	9.705	9.6	11.91	12.005	11.9						
5.11	5.205	5.1	7.41	7.505	7.4	9.71	9.805	9.7	12.01	12.1	12						

各種コーティング品も製作させていただきます。 Various of coating options are also available on special order basis.

※φ 2.910mm 未満のサイズは G シリーズ Size under φ 2.910mm will be G series reamer.

在庫一覧表(P.47~49) ※メーカー在庫(●)以外は、3本以上/1オーダーとさせていただきます。

Standard Inventory size list (P. 47~49) ※Apart from ●, it's available on made-to-order basis (Minimum Order Quantity: 3pcs/size)