

PERIPHERALS

T-SLOT CLEAN

Set in the T-slot on machine tables to prevent chips from being packed.

- Flattens surface of the table and aids quick removal of chips.
- Three sizes of groove widths are available to match the machine table. (T-slot widths 14/18/22mm)

Setup time greatly reduced




Before use





After use





Removal pin included



Other manufacturers



Due to the uniquely angled shape of the table T-slot contact part, slipout is prevented and chips are completely shut out.

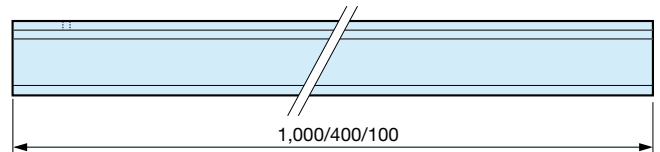

※ Cut for use, for dimensions not listed above.

[Standard set]

Set Model	W	Table groove width tolerance (H12)	Set contents
TS14-S	14	+0.18 0	400mm x 4 pcs 100mm x 4 pcs
TS18-S	18		
TS22-S	22	+0.21 0	Removal pin x 1 pc

[400mm set]

Set Model	W	Table groove width tolerance (H12)	Set contents
TS14-400L-100P	14	+0.18 0	400mm x 100 pcs
TS18-400L-100P	18		
TS22-400L-100P	22	+0.21 0	Removal pin x 10 pcs

Ideal for T-slots in large machines!

[1,000mm set]

Set Model	W	Table groove width tolerance (H12)	Set contents
TS18-1000L-10P	18	+0.18 0	1,000mm x 10 pcs Removal pin x 1 pc
TS22-1000L-10P	22	+0.21 0	